

MODEL 701

Zero Air System



Regenerative, heatless dryer for maintenance-free water removal independent of inlet dewpoint

Long life scrubbers for SO₂, NO, NO₂, O₃, H₂S

Optional CO or CO and Hydrocarbon scrubber

Automatic water drain

Automatic pump control based on flow demand

May be used to provide combustion air for FID (with HC Scrubber option)

Source of purge air for permeation tube ovens

Zero air for Ozone Generators

The Model 701 is an excellent source of clean, dry air for dilution calibrators. It also may be used as a source of purge air for permeation tube ovens or burner air for FID analyzers.

The regenerative heatless dryer removes water and produces a gas with a dewpoint of less than minus 20 degrees C, independent of inlet dewpoint. The regenerative dryer also assists in the removal of other gases, greatly increasing the life of the chemical scrubbers.

The basic Model 701 includes an oil-less diaphragm-less pump plus scrubbers to remove SO₂, NO, NO₂, O₃ and H₂S. Optional scrubbers are available to remove CO and Hydrocarbons.

Inlet air is pulled into the pump and routed through a pre-cooler and water trap, which takes out water. The air then passes through the regenerative scrubber where the final drying action is taken, and from there to the storage tank.

Tank pressure is monitored and maintained at a preset level by cycling the pump automatically as needed, extending pump and scrubber life. The outlet of the tank is scrubbed and goes through a filter to produce a clean and dry zero air supply.

A microcontroller cycles the regenerative dryer and the water trap valves, ensuring that the pump doesn't start against full head pressure.


The Model 701 is an ideal accessory to the Model 700 Mass Flow Calibrator or Model 702 Single Point Calibrator as a zero air source for analyzers.

MODEL 701



Zero Air System

Model 701 schematic

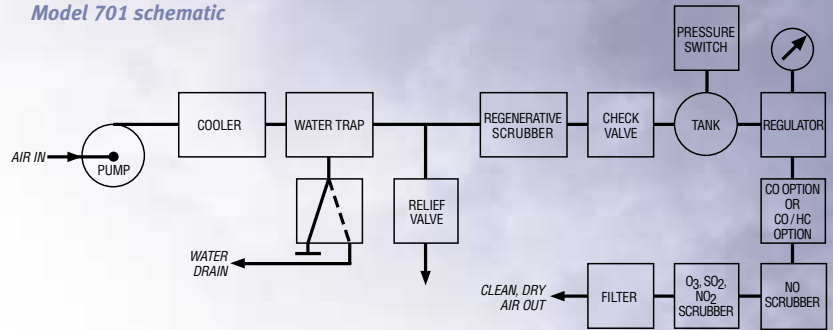

SPECIFICATIONS

Output:	10 SLPM@30 psig	Pump:	Internal long-life, oil-less piston pump
Dewpoint:	< -20°C up to 15 LPM < -10°C up to 20 LPM	Mounting:	Bench type mounting, rack mount optional
Dryer:	Regenerative heatless dryer with lifetime of greater than 5 years	Dimensions (HxWxD):	8.75" (22.2 cm) x 17" (43.2 cm) x 23.5" (59.7 cm)
Output concentrations (maximum):	SO ₂ <0.5 ppb NO <0.5 ppb NO ₂ <0.5 ppb O ₃ <0.5 ppb CO <0.025 ppm (requires optional scrubber) Hydrocarbons <0.02 ppm (requires optional scrubber)	Weight:	55 lbs (25 kg)
		Power Requirements:	100V 50/60 Hz, 115V 60 Hz, 220V 50/60 Hz, 230V 50 Hz, 240V/50 Hz, 400 Watts
		Approvals:	CE

HOW TO ORDER

Model 701 Zero Air System includes:

- Internal pump
- Regenerative dryer
- Bench mounting
- Scrubbers for SO₂, NO, NO₂, O₃, H₂S
- Output of 10 SLPM

Specify voltage/frequency:

- | | |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> 100V/50 Hz | <input type="checkbox"/> 100V/60 Hz |
| <input type="checkbox"/> 220V/50 Hz | <input type="checkbox"/> 115V/60 Hz |
| <input type="checkbox"/> 230V/50 Hz | <input type="checkbox"/> 220V/60 Hz |
| <input type="checkbox"/> 240V/50 Hz | |

Additional Options:

- Rack Mount (19")
- Rack Mount with slides
- CO scrubber
- Hydrocarbon and CO scrubber
- 20 SLPM output

For more information on API's family of monitoring instrumentation products, call us or visit our website at www.advpol.com